0.5GPF Low Consumption Washout Urinal

FEATURES

- 0.5GPF
- Compact urinal with concealed integral trap
- Washout flush action with 3/4" top spud inlet
- Designed for reclaimed water use

MODELS

ut104ex.pdf

UT104EX
Urinal with 3/4" top spud inlet

ADDITIONAL ITEMS

 THU3010 Stainless Steel Urinal Drain Cover

EcoPower® Flush Valves (0.5 GPF)		
Exposed		
TEU1LAX12#CP		



COLORS/FINISHES

Standard #01 Cotton

PRODUCT SPECIFICATION

The wall-mounted, ADA compliant, low consumption washout urinal shall be 0.5GPF/1.9LPF when paired with a 0.5GPF flushometer valve. Urinal specified shall be model UT104EX_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1,
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant







0.5GPF Low Consumption Washout Urinal

SPECIFICATIONS

Water Use	0.5GPF/1.9LPF	
Flush System	Washout flush action	
Warranty	One Year Limited Warranty	
Material	Vitreous China	
Min. Water Pressure	15 psi (Flowing)	
Height (Urinal Only)	21-3/4"	
Width	13"	
Rim	14"	
Shipping Weight	34.5lbs	
Shipping Dimensions	24" L x 13-3/4" W x 15-1/8" H	


INSTALLATION NOTES

RECLAIMED WATER QUALITY PARAMETERS		
Chloride Ion Concentration	< 600mg/L	
рН	5.8~8.6	
Free Carbonate	< 50mg/L	
Langelier's Index	> -3.00	
Nitrate Ion Concentration	< 60mg/L	
Conductivity	< 250mS/m	
Sulfate Ion Concentration	< 100mg/L	
Residual Chlorine Concentration	< 2mg/L	
Hydrogen Sulfide Gas	None Existance	
Suspended Solids	< 5mg/L	

Adjust angle stop accordingly to prevent overflow. Confirm with local codes and standards for floor drain requirement.

TOTO Reclaimed Water flush valves are designed to perform best when used with TOTO Reclaimed Water urinals/toilets and components. Although TOTO Reclaimed Water products may be used in combination with other reclaimed water product brands, optimal performance might be impaired and attempted use with any non-compliant reclaimed water product(s) could result in corrosion, leakage or void the warranty.

DIMENSIONS

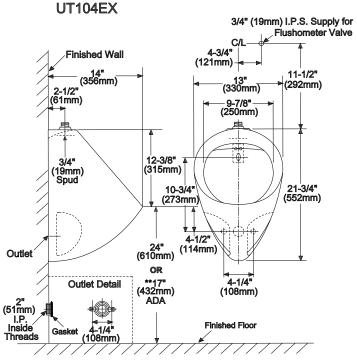

**Recommended for ADA height installation for 17" floor to rim.

